



# Diesel Compact Three phase BG1100

	Prime	Standby
Genset model	DN3-BG1100P	DN3-BG1100S
380-415V	1000kVA	1100kVA
50Hz	800kW	880kW
480/440V	987.5kVA	1093kVA
60Hz	790kW	875kW

Ratings at 0.8 pf

**Prime:**

This rating is for the supply of continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation on the annual hours of operation and 10% overload power can be supplied for one hour in twelve hours.

**Standby:**

This rating is for the supply of continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted.

Engine model (50Hz)	Perkins 4008-TAG2A	
Number of cylinders	8 in-line	
Cubic capacity	litre (cu inch)	30.6 (1,867)
Aspiration	Turbocharged	
Alternator	Newage Stamford	



Genset photograph may include optional extras



Frequency		50Hz	60Hz
Engine speed	rpm	1,500	1,800
Fuel tank capacity	litre (USgal)	TBA (TBA)	TBA (TBA)
Fuel consumption at full rating: Prime	litre /h (USgal /h)	220 (58.12)	224 (59.18)
Standby	litre /h (USgal /h)	248 (65.52)	249 (65.79)
Heat rejection to exhaust system (max)	kW (BTU /min)	807 (45,930)	811 (46,158)
Heat rejection to cooling system (max)	kW (BTU /min)	606 (34,490)	625 (35,572)
Total radiated heat (max)	kW (BTU /min)	100 (5,692)	100 (5,692)
Exhaust temperature (max)	deg C (deg F)	465 (869)	505 (941)
Radiator cooling air flow	cu m /min (cfm)	1,350 (47,675)	1,290 (45,556)
with max restriction	mm (inch) H <sub>2</sub> O	18 (0.7)	13 (0.5)
Combustion air flow (max)	cu m /min (cfm)	80.5 (2,843)	75 (2,649)
Exhaust gas flow (max)	cu m /min (cfm)	200 (7,063)	202 (7,134)
with max allowable back pressure	mm (inch) H <sub>2</sub> O	816 (32.1)	683 (26.9)


Note: Standard reference conditions: 25°C (77°F) air inlet temperature, 152.4m (500ft) above sea level, 60% relative humidity. All engine performance data based on the above mentioned maximum continuous ratings. Fuel consumption data at full load for diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, class A2.





# Diesel Compact Three phase BG1100

Dimensions:		
Length (A)	mm (inch)	4,677 (184.1)
Width (B)	mm (inch)	2,060 (81.1)
Height (C)	mm (inch)	2,361 (93)
Total height of exhaust rain cap (D)	mm (inch)	NA
Max horizontal projection of end door (E)	mm (inch)	NA
Max horizontal projection of doors at each side (F)	mm (inch)	NA

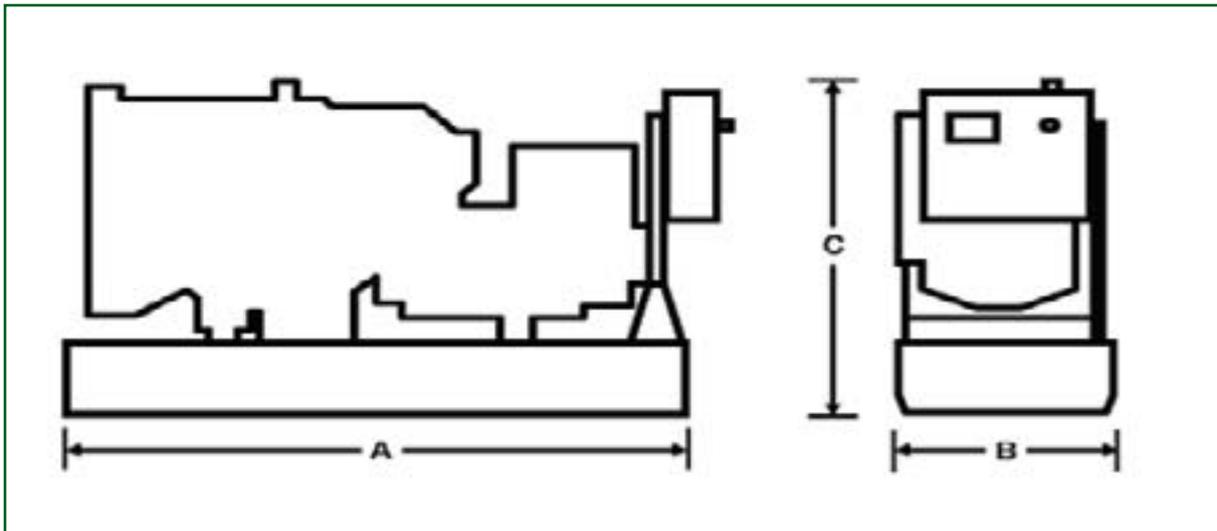

Weights:		
Dry weight (with lube oil)	kg (lb)	7,202 (15,877)
Wet weight (with lube oil and coolant)	kg (lb)	7,500 (16,534)

Sound pressure levels:		50Hz	60Hz
		1,500rpm	1,800rpm
15m, 75% load	dB(A)	NA	NA
15m, 100% load	dB(A)	NA	NA
7m, 75% load	dB(A)	NA	NA
7m, 100% load	dB(A)	NA	NA
1m, 75% load	dB(A)	NA	NA
1m, 100% load	dB(A)	NA	NA

In line with our policy of continuous development, we reserve the right to change specification without notice

DN3-BG1100 - DS-906-0311