



# Diesel Compact Three phase BG55

	Prime	Standby
Genset model	DN3-BG55P	DN3-BG55S
380-415V, 50Hz	50kVA	55kVA
	40kW	44kW
440-480V, 60Hz	60kVA	66.2kVA
	48kW	53kW
Ratings at 0.8 pf		
<b>Prime:</b> This rating is for the supply of continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation on the annual hours of operation and 10% overload power can be supplied for one hour in twelve hours.		
<b>Standby:</b> This rating is for the supply of continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted.		



Engine model	AGCOSisuPower	320 DRG
Number of cylinders	3 in-line	
Cubic capacity	litre (cu inch)	3.30 (201)
Aspiration	Turbocharged	
Alternator	Newage Stamford	



Genset photograph may include optional extras

Frequency		50Hz	60Hz
Engine speed	rpm	1,500	1,800
Fuel tank capacity	litre (USgal)	220 (58.1)	220 (58.1)
Fuel consumption at full rating: Prime	litre /h (USgal /h)	9.5 (2.51)	11.4 (3.01)
Standby	litre /h (USgal /h)	11 (2.91)	12.9 (3.41)
Heat rejection to exhaust system (max)	kW (BTU /min)	50.5 (2,875)	60.8 (3,460)
Heat rejection to cooling system (max)	kW (BTU /min)	32.9 (1,873)	38.1 (2,168)
Total radiated heat (max)	kW (BTU /min)	12.5 (711)	14.5 (825)
Exhaust temperature (max)	deg C (deg F)	521 (970)	502 (936)
Radiator cooling air flow	cu m /min (cfm)	64.2 (2,267)	110.9 (3,916)
with max restriction	mm (inch) H <sub>2</sub> O	20 (0.80)	20 (0.80)
Combustion air flow (max)	cu m /min (cfm)	3.9 (138)	4.9 (173)
Exhaust gas flow (max)	cu m /min (cfm)	10.4 (367)	12.9 (456)
with max allowable back pressure	mm (inch) H <sub>2</sub> O	800 (31.5)	700 (27.6)

Note: Standard reference conditions: 25°C (77°F) air inlet temperature, 152.4m (500ft) above sea level, 60% relative humidity. All engine performance data based on the above mentioned maximum continuous ratings. Fuel consumption data at full load for diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, class A2.




## Burtonwood™

Generator & Switchgear Services

Data Sheet DN3-BG55

Dimensions:		
Length (A)	mm (inch)	2,213 (87.1)
Width (B)	mm (inch)	760 (30.0)
Height (C)	mm (inch)	1,495 (58.9)
Total height of exhaust rain cap (D)	mm (inch)	NA
Max horizontal projection of end door (E)	mm (inch)	NA
Max horizontal projection of doors at each side (F)	mm (inch)	NA

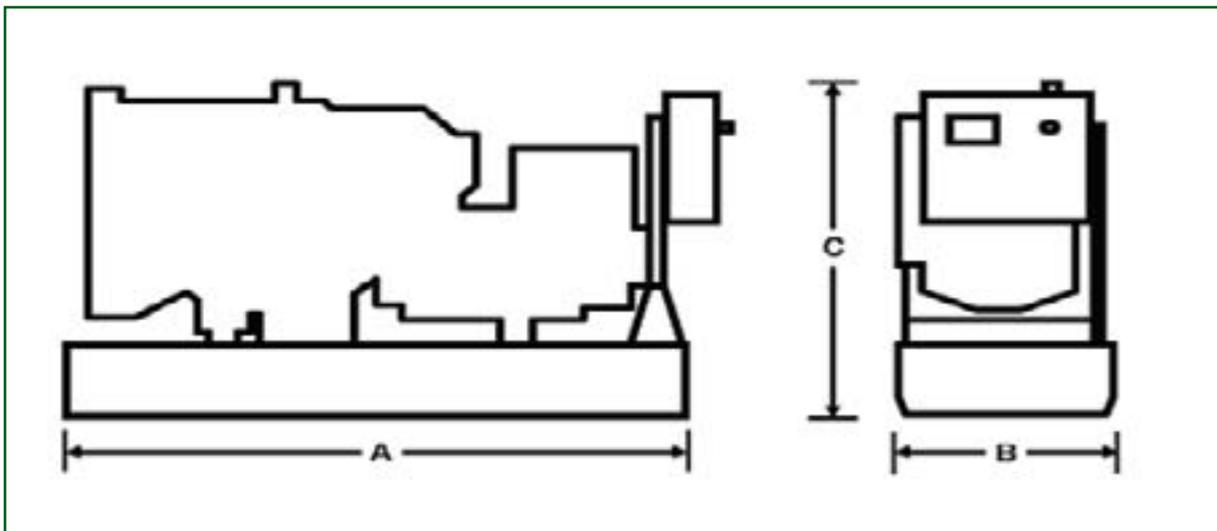

Weights:		
Dry weight (with lube oil)	kg (lb)	1,019 (2,246)
Wet weight (with lube oil and coolant)	kg (lb)	1,039 (2,290)

Sound pressure levels:		50Hz	60Hz
		1500rpm	1800rpm
15m, 75% load	dB(A)	TBA	TBA
15m, 100% load	dB(A)	TBA	TBA
7m, 75% load	dB(A)	TBA	TBA
7m, 100% load	dB(A)	TBA	TBA
1m, 75% load	dB(A)	TBA	TBA
1m, 100% load	dB(A)	TBA	TBA

In line with our policy of continuous development, we reserve the right to change specification without notice

DN3-BG55 - DS-501-0311