



Diesel Compact Three phase BG14

	Prime	Standby
Genset model	EN3-BG14P	EN3-BG14S
380-415V, 50Hz	13.0kVA	14.3kVA
	10.4kW	11.4kW
220/127V, 60Hz	15.6kVA	17.4kVA
	12.5kW	13.9kW
Ratings at 0.8 pf		
Prime: This rating is for the supply of continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation on the annual hours of operation and 10% overload power can be supplied for one hour in twelve hours.		
Standby: This rating is for the supply of continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted.		



Engine model	Perkins	403D-15G
Number of cylinders	3 in-line	
Cubic capacity	litre (cu inch)	1.50 (91)
Aspiration	Naturally Aspirated	
Alternator	European	



Genset photograph may include optional extras

Frequency		50Hz	60Hz
Engine speed	rpm	1,500	1,800
Fuel tank capacity	litre (USgal)	100 (26.4)	100 (26.4)
Fuel consumption at full rating: Prime	litre /h (USgal /h)	3.70 (0.98)	4.90 (1.29)
Standby	litre /h (USgal /h)	4.10 (1.08)	4.40 (1.16)
Heat rejection to exhaust system (max)	kW (BTU /min)	10.3 (586)	11.8 (672)
Heat rejection to cooling system (max)	kW (BTU /min)	12.9 (734)	15.2 (865)
Total radiated heat (max)	kW (BTU /min)	3.5 (199)	4.3 (245)
Exhaust temperature (max)	deg C (deg F)	490 (914)	505 (941)
Radiator cooling air flow	cu m /min (cfm)	25.2 (890)	43.2 (1,526)
with max restriction	mm (inch) H ₂ O	12.7 (0.5)	12.7 (0.5)
Combustion air flow (max)	cu m /min (cfm)	1.10 (39)	1.23 (43)
Exhaust gas flow (max)	cu m /min (cfm)	2.90 (102)	3.36 (119)
with max allowable back pressure	mm (inch) H ₂ O	1040 (40.9)	1040 (40.9)

Note: Standard reference conditions: 25°C (77°F) air inlet temperature, 152.4m (500ft) above sea level, 60% relative humidity. All engine performance data based on the above mentioned maximum continuous ratings. Fuel consumption data at full load for diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, class A2.



Burtonwood™


Generator & Switchgear Services

Data Sheet EN3-BG14



Diesel Compact Three phase BG14

Dimensions:		
Length (A)	mm (inch)	1,325 (52.2)
Width (B)	mm (inch)	720 (28.3)
Height (C)	mm (inch)	1,185 (46.7)
Max horizontal projection of open door (D)	mm (inch)	NA
Max total height of open door (E)	mm (inch)	NA
Max horizontal projection of doors at each side (F)	mm (inch)	NA

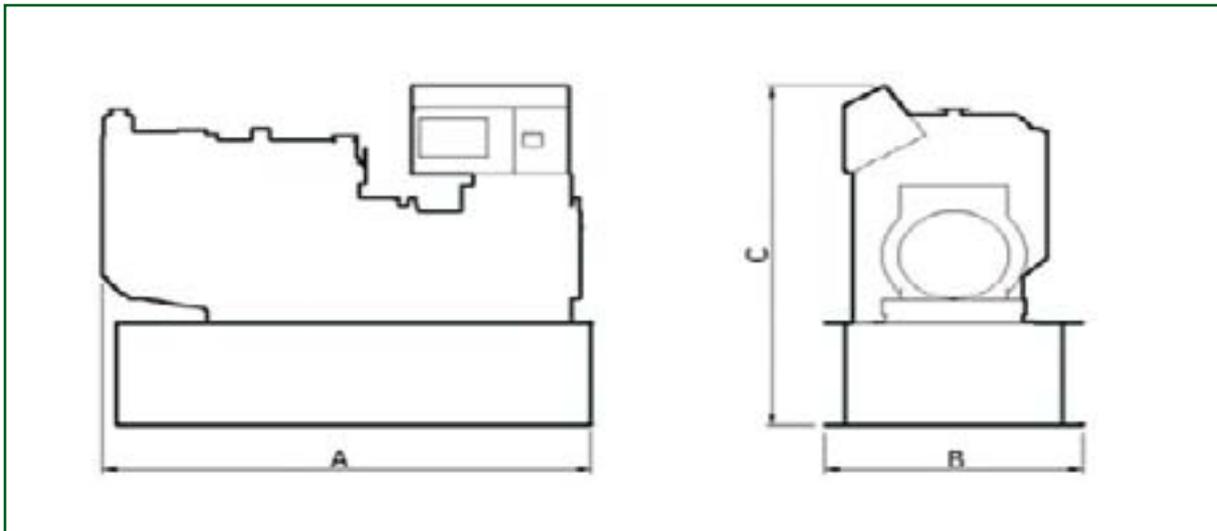

Weights:		
Dry weight (with lube oil)	kg (lb)	484 (1067)
Wet weight (with lube oil and coolant)	kg (lb)	492 (1085)

Sound pressure levels:		50Hz	60Hz
		1500rpm	1800rpm
15m, 75% load	dB(A)	NA	NA
15m, 100% load	dB(A)	NA	NA
7m, 75% load	dB(A)	NA	NA
7m, 100% load	dB(A)	NA	NA
1m, 75% load	dB(A)	NA	NA
1m, 100% load	dB(A)	NA	NA

In line with our policy of continuous development, we reserve the right to change specification without notice

EN3-BG14 - DS-322-0311



Burtonwood[™]
Generator & Switchgear Services

Tel: +44 (0) 1744 814444
Fax: +44 (0) 1744 814455
Email: sales@burtonwoodgroup.com
Web: www.burtonwoodgroup.com

Unit 2, St Michaels Road
St Helens
Merseyside
WA9 4WZ