



# Diesel Compact Three phase BG660P

	Prime	Standby
Genset model	DN3-BG660P	DN3-BG660S
400V, 50Hz	600kVA	660kVA
	480kW	528kW
440V, 60Hz	650kVA	718.8kVA
	520kW	575kW
Ratings at 0.8 pf		
<b>Prime:</b> This rating is for the supply of continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation on the annual hours of operation and 10% overload power can be supplied for one hour in twelve hours.		
<b>Standby:</b> This rating is for the supply of continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted.		

Engine model	Perkins	2806A-E18TAG1A
Number of cylinders	6 in line	
Cubic capacity	litre (cu inch)	18.1 (1,106)
Aspiration	Turbocharged	
Alternator	Newage Stamford	



Genset photograph may include optional extras

Frequency		50Hz	60Hz
Engine speed	rpm	1,500	1,800
Fuel tank capacity	litre (USgal)	1,500 (396.3)	1,500 (396.3)
Fuel consumption at full rating:	litre /h (USgal /h)	123 (32.5)	127 (33.55)
Prime			
Standby	litre /h (USgal /h)	134 (35.4)	141 (37.25)
Heat rejection to exhaust system (max)	kW (BTU /min)	442.1 (25,162)	482 (27,433)
Heat rejection to cooling system (max)	kW (BTU /min)	222 (12,635)	190 (10,814)
Total radiated heat (max)	kW (BTU /min)	42 (2,390)	44 (2,504)
Exhaust temperature (max)	deg C (deg F)	571 (1,060)	489 (912)
Radiator cooling air flow	cu m /min (cfm)	606 (21,401)	762 (26,910)
with max restriction	mm (inch) H <sub>2</sub> O	25 (1.0)	25 (1.0)
Combustion air flow (max)	cu m /min (cfm)	36 (1,271)	45 (1,589)
Exhaust gas flow (max)	cu m /min (cfm)	104 (3,673)	118 (4,167)
with max allowable back pressure	mm (inch) H <sub>2</sub> O	690 (27.2)	690 (27.2)

Note: Standard reference conditions: 25°C (77°F) air inlet temperature, 152.4m (500ft) above sea level, 60% relative humidity. All engine performance data based on the above mentioned maximum continuous ratings. Fuel consumption data at full load for diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, class A2.



**Burtonwood**<sup>TM</sup>


Generator & Switchgear Services

Data Sheet DN3-BG660P



# Diesel Compact Three phase BG660P

Dimensions:		
Length (A)	mm (inch)	3,883 (152.9)
Width (B)	mm (inch)	1,125 (44.3)
Height (C)	mm (inch)	2,130 (83.9)
Total height of exhaust rain cap (D)	mm (inch)	NA
Max horizontal projection of end door (E)	mm (inch)	NA
Max horizontal projection of doors at each side (F)	mm (inch)	NA

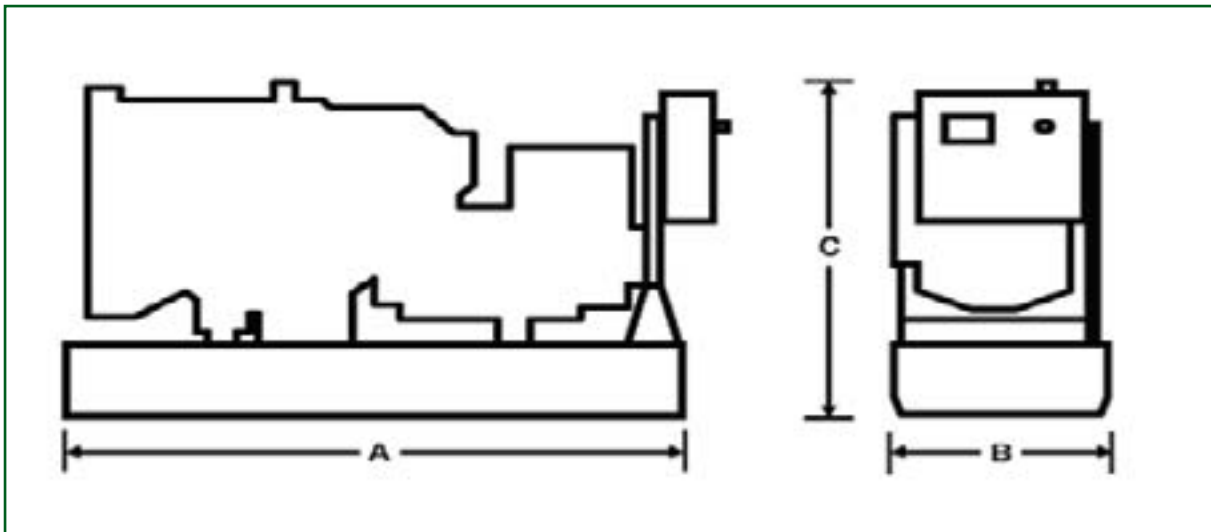

Weights:		
Dry weight (with lube oil)	kg (lb)	4,693 (10,346)
Wet weight (with lube oil and coolant)	kg (lb)	4,801 (10,584)

Sound pressure levels:		50Hz	60Hz
		1500rpm	1800rpm
15m, 75% load	dB(A)	TBA	TBA
15m, 100% load	dB(A)	TBA	TBA
7m, 75% load	dB(A)	TBA	TBA
7m, 100% load	dB(A)	TBA	TBA
1m, 75% load	dB(A)	TBA	TBA
1m, 100% load	dB(A)	TBA	TBA

In line with our policy of continuous development, we reserve the right to change specification without notice

DN3-BG660P - DS-717-0311



**Burtonwood**<sup>™</sup>  
Generator & Switchgear Services

Tel: +44 (0) 1744 814444  
Fax: +44 (0) 1744 814455  
Email: [sales@burtonwoodgroup.com](mailto:sales@burtonwoodgroup.com)  
Web: [www.burtonwoodgroup.com](http://www.burtonwoodgroup.com)

Unit 2, St Michaels Road  
St Helens  
Merseyside  
WA9 4WZ